



Model BS-520BK Si Photodiode detector

(for Amorphous silicon (a-Si) solar cell and the Dye-sensitized Solar Cell (DSC), organic photovoltaics(OPV), Perovskite solar cell)




The BS-520BK is the Photodiode detector which is calibrated by the solar simulator whose light intensity is calibrated by the secondary reference amorphous solar cell. Using the heat ray cut filter in the BS-520 Photodiode detector, infrared spectral response has been reduced and characteristic of spectra response of the BS-520BK is similar to that of the thin film amorphous silicon solar cell, DSC, OPV, and Perovskite solar cell.

- The BS-520BK can be used to adjust light intensity of the solar simulators that evaluate the output of the organic solar cells (DSC, OPV and Perovskite solar cell).
- Referring to the JIS C 8913 (secondary reference amorphous solar cell) and publication of Professor Seigo Ito, the property of the spectral response of the BS-520BK detector has been made similar to that of the organic solar cell.
- The current value in 1SUN is described on each of BS-520BK detector.
- The spectral response data for each BS-520BK can be offered optionally

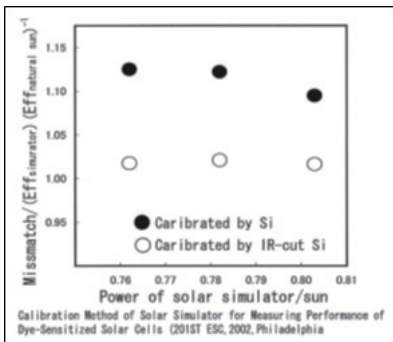

The above data is quoted from the publication of Professor Seigo Ito. This shows the comparison of the data using IR-cut Si sensor. We can see that this is also very similar to natural light.

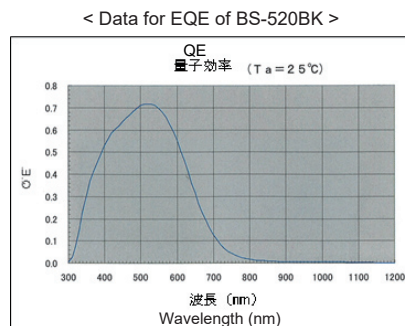

How to use BS-520BK

1. Turn on the light of the solar simulator.
2. Place the BS-520BK detector to the irradiation area.
3. Set the alligator clips on the pins of the BS-520BK and then connect the cables to the circuit tester
4. Check the value of the output current of the BS-520BK.
5. Adjust the irradiation intensity of the solar simulator to the current value described on the BS-520BK detector.

●The specifications and appearance of the BS-520BK are subject to change without prior notice.

< BS-520BK-1708024N >

BUNKOUKEIKI CO., LTD.

<http://www.bunkoukeiki.co.jp/>

Headquarters 4-8, Takakura-cho, Hachioji-shi, Tokyo, 192-0033, Japan
Tel: +81-(0)42-646-4123 Fax: +81-(0)42-644-3881

Tokyo sales office 3-23-1 Yushima, Bunkyo-ku, Tokyo, 113-0034, Japan
Tel: +81-(0)3-3837-1021 Fax: +81-(0)3-3837-1023

Osaka sales office 3-24-5 Toyoshin, Yodogawa-ku, Osaka-shi, Osaka-fu
533-0014, Japan
Tel: +81-(0)6-6323-4502 Fax: +81-(0)6-6323-4902

●Contact